




 H5 audits vision: network visibility technology


Thank to its 20 years experience in IT network audits, H5 audits has designed innovative technologies that enable enterprises, service providers and governments to enhance their global network and application visibility. With H5 Appliance, Corporations can deploy an “easy to use” and comprehensive software and hardware solution that allows the various teams to access IT information in an adapted format (in regards to their position and expertise). Using a common tool for IT Reporting allows to broadcast a clear and comprehensive information on applications behaviour and trending of the network. H5-Appliance provides a powerful network visibility solution for Network operations center to pilot the IT, for network managers who are responsible for building and planning growth & IT changes and for the helpdesk interfacing and supporting users with IT issues on daily basis.

 H5-Appliance cc : Embedded rolling buffer

The H5-200cc Appliance has additional resources storage 100% dedicated to Network traces storage and history. This new feature allows to drill-down on a specific traffic, or a selected IP or a monitored object to get the associated network trace on a past period; it can be easily exported in a pcap file format. Embedded rolling-buffer is available from 4.0 version. Please contact your sales department for upgrading older versions.

H5-Appliance : network visibility made safe, easy and cost effective

The H5-200cc Appliance is easily deployed on any network; it is installed on a 1 Gbps port mirroring interface or a 1 Gbps tap and does NOT require any network change or interruption. The H5-200cc Appliance requires no complex configuration and no architecture design; it inspects the traffic and extracts all required data in real-time. First report is delivered within few minutes along with network application data from appliance implementation and deployment.

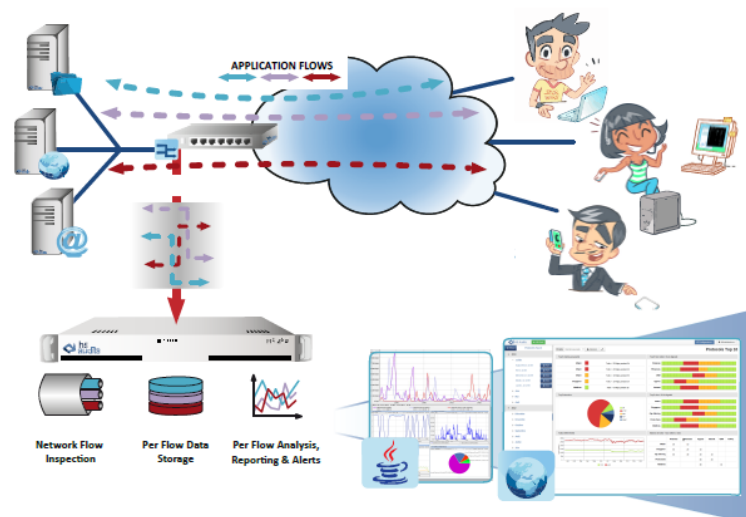



Performance

| | |
|--|--|
| Packet Performance (pps) | 50 000 pps |
| Throughput Performance | 200 Mbps |
| 1-minute / 5-minutes/ 1-hour/ 1-day data storagejour | 30 days/ 3 months/ 6 months/ 12 months |
| Monitored Objects | 200 |
| Business Flow | 100 |
| VLAN | 100 |
| Rolling Buffer- Cyclic capture | 2 To |

Hardware Specifications

| | |
|-----------------------------------|---|
| Dimensions (H x L x P) | 43mm x 426 mm x 356 mm – 1U |
| Weight (Rack) | 9 Kg |
| Transport Box size (H x W x D) | 160mm x 570mm x 500mm |
| Weight (Transport) | 11 Kg |
| Operating temperature | +10°C à +40°C/ +50°F à +95°F |
| Operating relative humidity | 5 à 90%, non-condensing |
| Operating elevation | 0 to + 3 000m / 0 to +10,000ft |
| Safety, Approvals, Certifications | UL 1778/ UL 497A ; CSA 107.1 FCC part 15 VDE, EN50091, EN60950 |
| Certifications | FCC /DOC Class B EN5 5022 |
| Electromagnetic Immunity | IEC 801-4 niveau IV ; 801-5 niveau III IEC 801-2 niveau IV ; 801-3 niveau III 801-4 niveau IV |
| Number of power supplies | 1 |
| Power consumption | 1.8A@220 V ; 4A@115 VAC |
| Back panel | 2 x 10/100/1000 Ethernet Monitor Ports 1x 10/100/1000 Copper Ethernet Admin Port Serial port ; Keyboard port ; VGA port |



Contact us
Tel : +33 1.56.83.77.36.
commercial@h5audits.com

Join us
www.h5audits.com